




NEVER BEND THE ANTENNA CABLE

Always loosely coil up extra antenna cable. Never bend or pinch the antenna cable. When routing antenna cables around the dash do not force the cable between the panels. Check for pinch points or sharp brackets behind the dash that may rip or damage the cable.

ANTENNA MOUNTING

When mounting the antenna, make sure the FLAT side of the antenna has a clear view of the sky. We recommend mounting the antenna on the windshield.

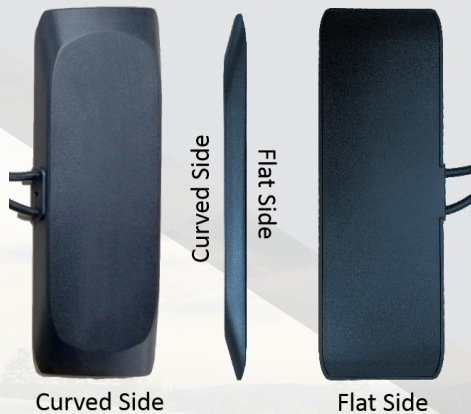

POST INSTALLATION CHECKLIST

- Is the red wire connected to constant power (ahead of kill switch if applicable)?
- Is the yellow wire connected to ignition power?
- Did you adjust the camera angle?
- Are both lens protectors removed?
- Are all components and cables secured with zip ties?
- Is the antenna mounted the correct way?

WE'RE HERE TO HELP

IF YOU HAVE ANY VEHICLE-RELATED OR TECHNICAL QUESTIONS, PLEASE FEEL FREE TO REACH OUT TO US VIS THE METHODS BELOW.

EMAIL US: TECHSUPPORT@ROSCOVISION.COM

CALL US: 718.526.2601

VISIT OUR WEBSITE: WWW.ROSCOVISION.COM

SCAN ME FOR DVXC4 USER MANUALS ON ROSCO CLOUD WIKI*



https://wiki.roscocloud.com/user:product:dual-vision_recording:dual-vision_xc4:user_manual

*Login required to access Rosco Wiki pages

DUAL-VISION™ XC4 DV440

QUICK START INSTALLATION GUIDE

SCAN ME FOR DVXC4 INSTALLATION GUIDE ON ROSCO CLOUD WIKI*



https://wiki.roscocloud.com/user:product:dual-vision_recording:dual-vision_xc4:installation_guide:home

*Login required to access Rosco Wiki pages



90-21 144TH PLACE
JAMAICA, NY 11435


LIT P/N: MNL DV440QSG
VERSION 1.0
12/17/2018

DV440 RECORDERS SHOULD BE INSTALLED WITH SAFETY IN MIND

- Make sure all wiring and harnesses are zip tied to factory wiring or brackets.
- Make sure wires are away from all steering functions and will not cause a distraction to the driver.
- When routing cables in the vehicle A-Pillar use extreme caution in the vicinity of the airbag. **NEVER** zip tie or wrap around the airbag or airbag harness.

DOUBLE CHECK YOUR WIRING AFTER THE INSTALLATION!

RED = CONSTANT
YELLOW = IGNITION

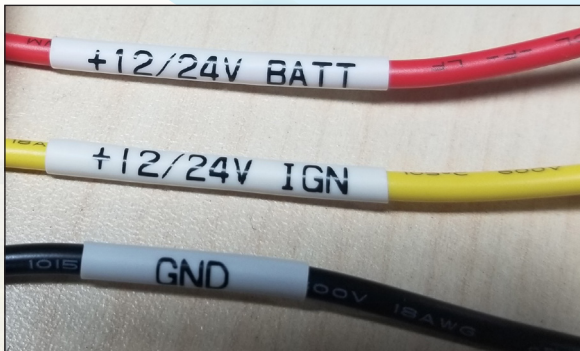

PLEASE REVIEW THIS DOCUMENT BEFORE INSTALLING YOUR RECORDER

Rosco recommends using a certified professional installer for all installations.

- Installation training is offered by Rosco via phone or webinar.
- Rosco provides vehicle specific installation manuals to assist with installations.
- If you have a RoscoLive account, you will have access to our Rosco Wiki page to view all installation materials.
- Full User Guide is available on SD card as a PDF.

EMAIL US: TECHSUPPORT@ROSCOVISION.COM
CALL US: 718.526.2601
VISIT OUR WEBSITE: WWW.ROSCOVISION.COM

RECORDER MOUNTING

VHB Tape should only be applied when windshield temperature is within 50°F-100°F (10°C-38°C) to allow proper curing of mounting adhesive pads

VHB Mounting Tips

Never use alcohol or alcohol-based cleaner!

- Wipe the windshield clean and apply Primer to the windshield & the Bracket.
- Only apply the VHB tape marked **PERMANENT** and apply pressure for 30 seconds.
- VHB tape will cure in 30 Minutes.

Do not apply recorder to the windshield until VHB tape is cured (30 Minutes).

